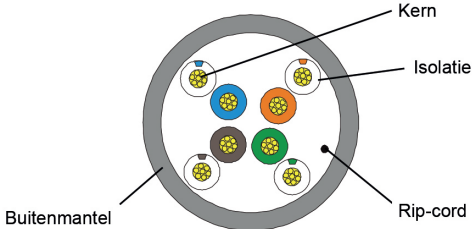


Cat5e - UTP - SOEPEL - PVC

Categorie	U/UTP CAT5E-4P-PVC																																																																																																				
Referentie	ISO/IEC 11801 TIA-568-C.2																																																																																																				
CPR Classificatie	Fca																																																																																																				
Kern	Soepel - 100% koper	<p>Technische prestaties (<30m):</p> <table border="1"> <thead> <tr> <th>Frequentie (Mhz)</th> <th>RL \geqdB</th> <th>ATT \leqdB</th> <th>NEXT \geqdB</th> <th>Phase DELAY \leqns</th> </tr> </thead> <tbody> <tr><td>1</td><td>19.0</td><td>3.0</td><td>60.0</td><td>521</td></tr> <tr><td>4.0</td><td>19.0</td><td>3.9</td><td>54.8</td><td>504</td></tr> <tr><td>8.0</td><td>19.0</td><td>5.5</td><td>50.0</td><td>500</td></tr> <tr><td>10.0</td><td>19.0</td><td>6.2</td><td>48.5</td><td>498</td></tr> <tr><td>16.0</td><td>19.0</td><td>7.9</td><td>45.2</td><td>496</td></tr> <tr><td>20.0</td><td>19.0</td><td>8.9</td><td>43.7</td><td>495</td></tr> <tr><td>25.0</td><td>18.0</td><td>10.0</td><td>42.1</td><td>495</td></tr> <tr><td>31.25</td><td>17.1</td><td>11.2</td><td>40.5</td><td>494</td></tr> <tr><td>62.5</td><td>14.1</td><td>16.2</td><td>35.7</td><td>492</td></tr> <tr><td>100</td><td>12.0</td><td>21.0</td><td>32.3</td><td>491</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequentie (Mhz)</th> <th>PSNEXT \geqdB</th> <th>ELFEXT \leqdB</th> <th>PSELFEXT \geqdB</th> </tr> </thead> <tbody> <tr><td>1</td><td>57.0</td><td>58.6</td><td>55.6</td></tr> <tr><td>4.0</td><td>51.8</td><td>46.6</td><td>43.6</td></tr> <tr><td>8.0</td><td>47.0</td><td>40.6</td><td>37.5</td></tr> <tr><td>10.0</td><td>45.5</td><td>38.6</td><td>35.6</td></tr> <tr><td>16.0</td><td>42.2</td><td>34.5</td><td>31.5</td></tr> <tr><td>20.0</td><td>40.7</td><td>32.6</td><td>29.6</td></tr> <tr><td>25.0</td><td>39.1</td><td>30.7</td><td>37.7</td></tr> <tr><td>31.25</td><td>37.5</td><td>28.7</td><td>25.7</td></tr> <tr><td>62.5</td><td>32.7</td><td>22.7</td><td>19.7</td></tr> <tr><td>100</td><td>29.3</td><td>18.6</td><td>15.6</td></tr> </tbody> </table>	Frequentie (Mhz)	RL \geq dB	ATT \leq dB	NEXT \geq dB	Phase DELAY \leq ns	1	19.0	3.0	60.0	521	4.0	19.0	3.9	54.8	504	8.0	19.0	5.5	50.0	500	10.0	19.0	6.2	48.5	498	16.0	19.0	7.9	45.2	496	20.0	19.0	8.9	43.7	495	25.0	18.0	10.0	42.1	495	31.25	17.1	11.2	40.5	494	62.5	14.1	16.2	35.7	492	100	12.0	21.0	32.3	491	Frequentie (Mhz)	PSNEXT \geq dB	ELFEXT \leq dB	PSELFEXT \geq dB	1	57.0	58.6	55.6	4.0	51.8	46.6	43.6	8.0	47.0	40.6	37.5	10.0	45.5	38.6	35.6	16.0	42.2	34.5	31.5	20.0	40.7	32.6	29.6	25.0	39.1	30.7	37.7	31.25	37.5	28.7	25.7	62.5	32.7	22.7	19.7	100	29.3	18.6	15.6
Frequentie (Mhz)	RL \geq dB		ATT \leq dB	NEXT \geq dB	Phase DELAY \leq ns																																																																																																
1	19.0		3.0	60.0	521																																																																																																
4.0	19.0		3.9	54.8	504																																																																																																
8.0	19.0		5.5	50.0	500																																																																																																
10.0	19.0		6.2	48.5	498																																																																																																
16.0	19.0		7.9	45.2	496																																																																																																
20.0	19.0		8.9	43.7	495																																																																																																
25.0	18.0		10.0	42.1	495																																																																																																
31.25	17.1		11.2	40.5	494																																																																																																
62.5	14.1		16.2	35.7	492																																																																																																
100	12.0		21.0	32.3	491																																																																																																
Frequentie (Mhz)	PSNEXT \geq dB		ELFEXT \leq dB	PSELFEXT \geq dB																																																																																																	
1	57.0		58.6	55.6																																																																																																	
4.0	51.8		46.6	43.6																																																																																																	
8.0	47.0		40.6	37.5																																																																																																	
10.0	45.5		38.6	35.6																																																																																																	
16.0	42.2		34.5	31.5																																																																																																	
20.0	40.7		32.6	29.6																																																																																																	
25.0	39.1		30.7	37.7																																																																																																	
31.25	37.5	28.7	25.7																																																																																																		
62.5	32.7	22.7	19.7																																																																																																		
100	29.3	18.6	15.6																																																																																																		
Afscherming	UTP																																																																																																				
AWG	26																																																																																																				
Diameter kabel	4,7 mm																																																																																																				
Lengte	50m																																																																																																				
Brandbreedte	100.0 MHz																																																																																																				
Buigradius	8x Diameter kabel																																																																																																				
Maximale trekkracht (Mpa)	≥ 12.5																																																																																																				
Materiaal buitenmantel	PVC																																																																																																				
Kleur buitenmantel	Grijs																																																																																																				
Aderkleuren	1 - Blauw/ Wit-Blauw																																																																																																				
	2 - Oranje/ Wit-Oranje																																																																																																				
	3 - Groen/ Wit-Groen																																																																																																				
	4 - Bruin/ Wit-Bruin																																																																																																				
Rip-cord	Aanwezig																																																																																																				
Verpakking	Trekdoos																																																																																																				